


BOSS General Structure For Stairway Tower Continuous Dog-Leg Configuration

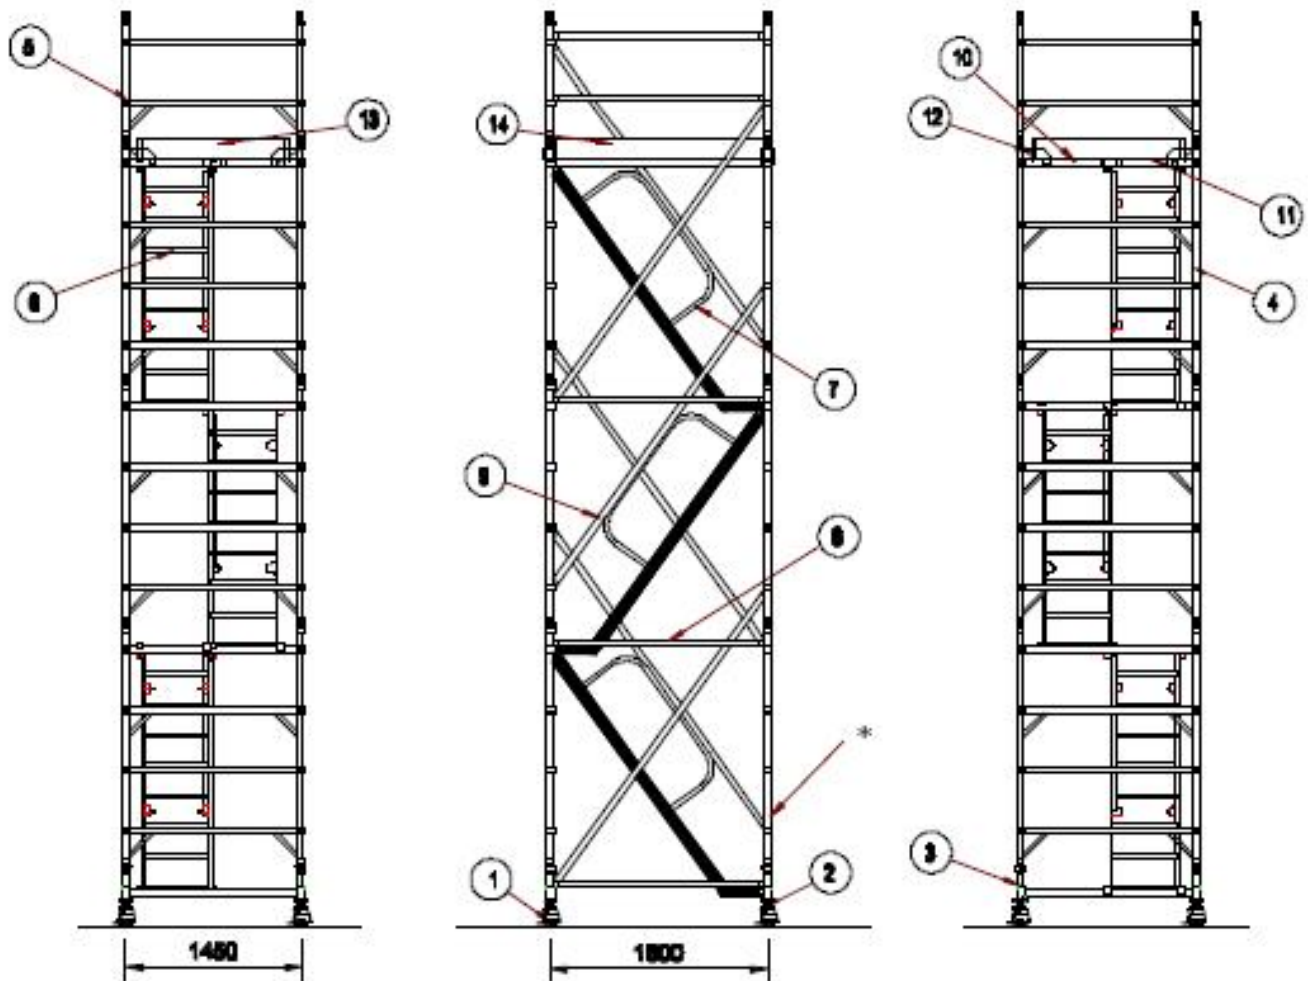


Item	Description	
1	Castor	125mm, 150mm or 200mm
2	Adjustable Leg	
3	Master Rung	
4	Span Frame - 4 Rung	
5	Span Frame - 2 Rung	
6	Staircase	
7	Internal Handrail	
8	Horizontal Brace	1.8m
9	Handrail Brace	3.08m
10	Fixed Deck	1.8m
11	Fully-Hinged Deck	1.8m
12	Toeboard Clip	
13	End Toeboard	1.2m
14	Side Toeboard	1.2m

Guidance Notes

6M Tower shown

* Walk through frame can be used in place of Span Frame to allow direct access to staircase. (see also Plan-Bracing).

BOSS General Structure For Stairway Tower Intermediate Deck Configuration

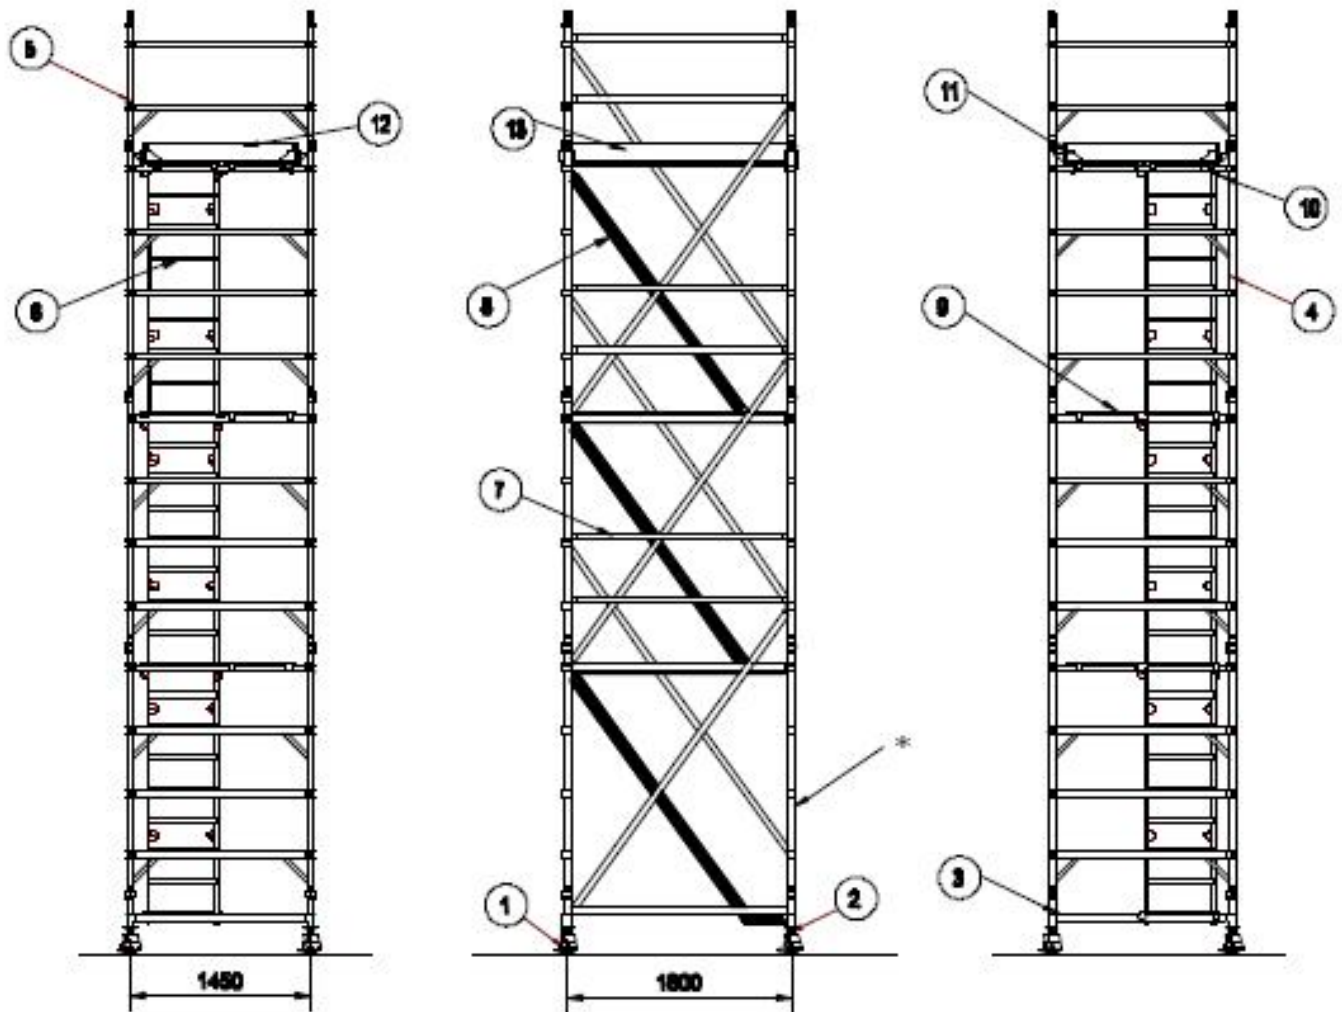


Item	Description	
1	Castor	125mm, 150mm or 200mm
2	Adjustable Leg	
3	Master Rung	
4	Span Frame - 4 Rung	
5	Span Frame - 2 Rung	
6	Staircase	
7	Horizontal Brace	1.8m
8	Handrail Brace	3.08m
9	Fixed Deck	1.8m
10	Fully-Hinged Deck	1.8m
11	Toeboard Clip	
12	End Toeboard	1.2m
13	Side Toeboard	1.2m

Guidance Notes


6M Tower shown

* Walk through frame can be used in place of Span Frame to allow direct access to staircase. (see also Plan-Bracing).


**BOSS Continuous Dog-Leg Stairway Tower Bracing Configuration
Platform Height 2.4m to 8.4m**

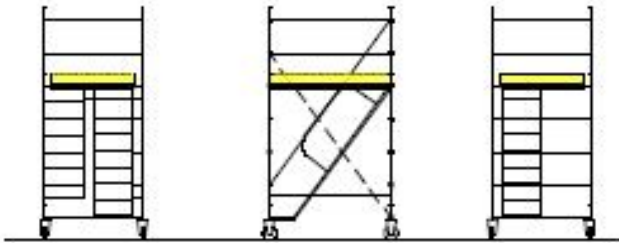


2.4m Deck Height

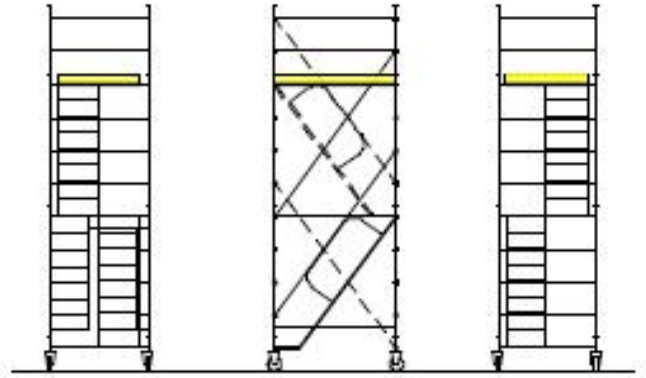

4.4m Deck Height

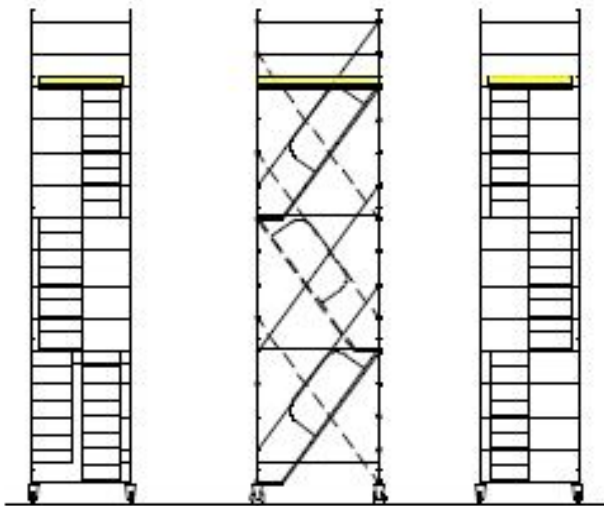


6.4m Deck Height

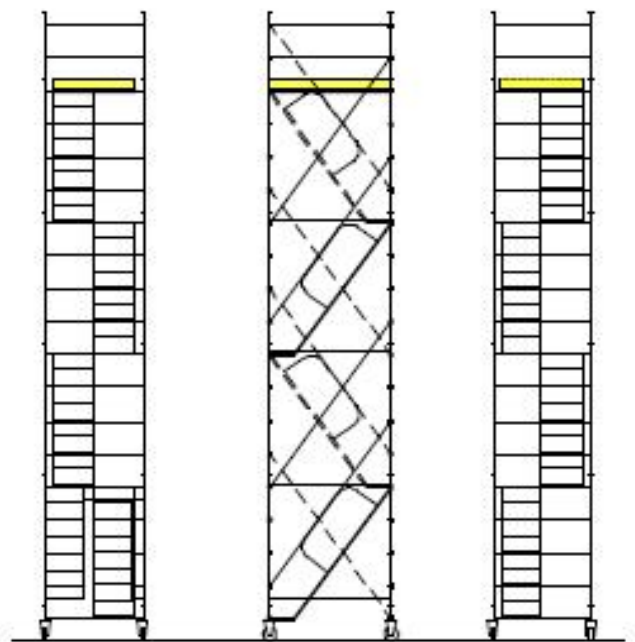


8.4m Deck Height

**BOSS Continuous Dog-Leg Stairway Tower Bracing Configuration
Platform Height 10.4m to 12.4m**

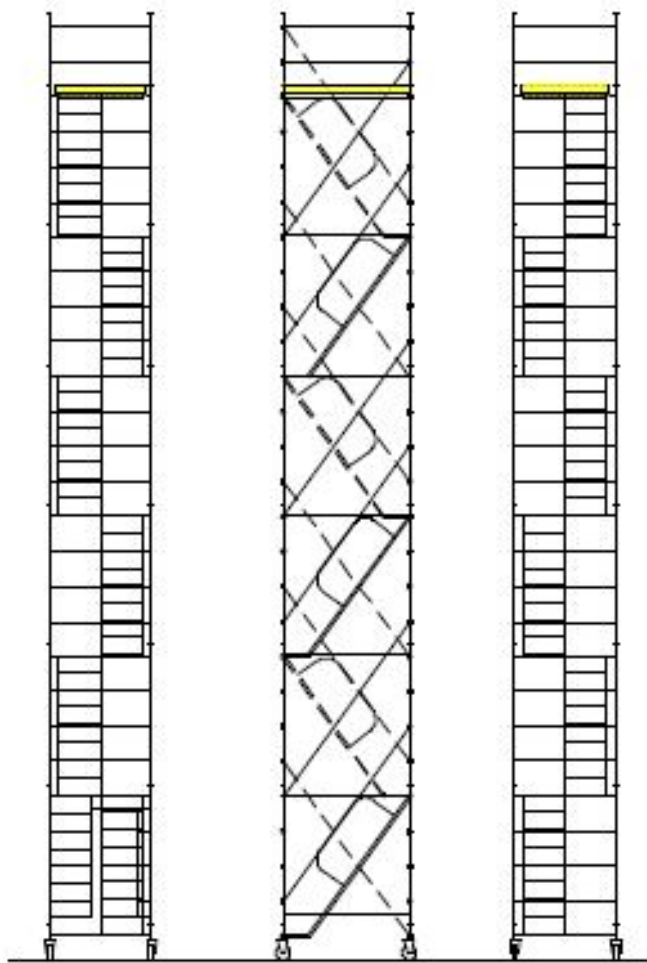


12.4m Deck Height

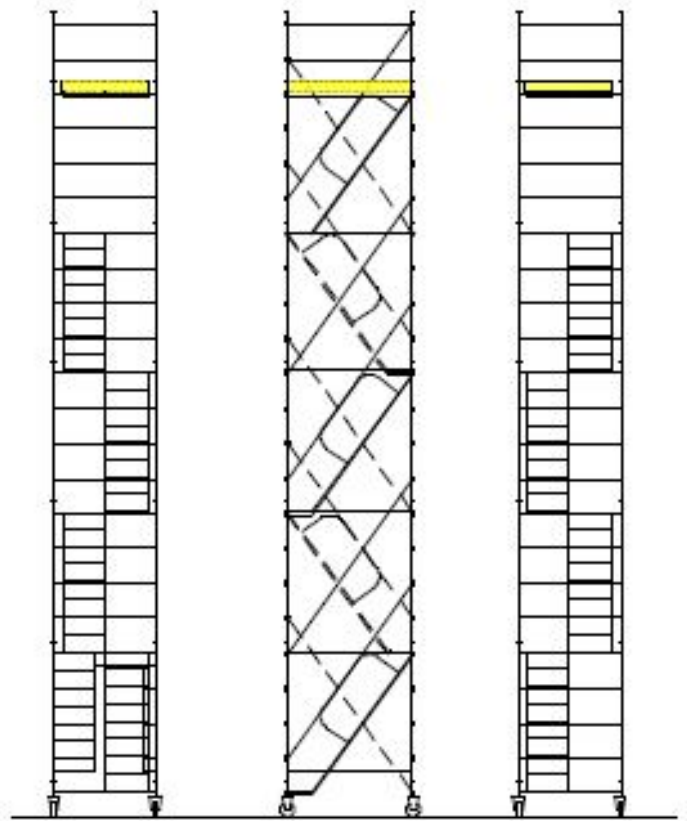

10.4m Deck Height


BOSS Intermediate Deck Stairway Tower Bracing Configuration Platform Heights 2.4m to 8.4m

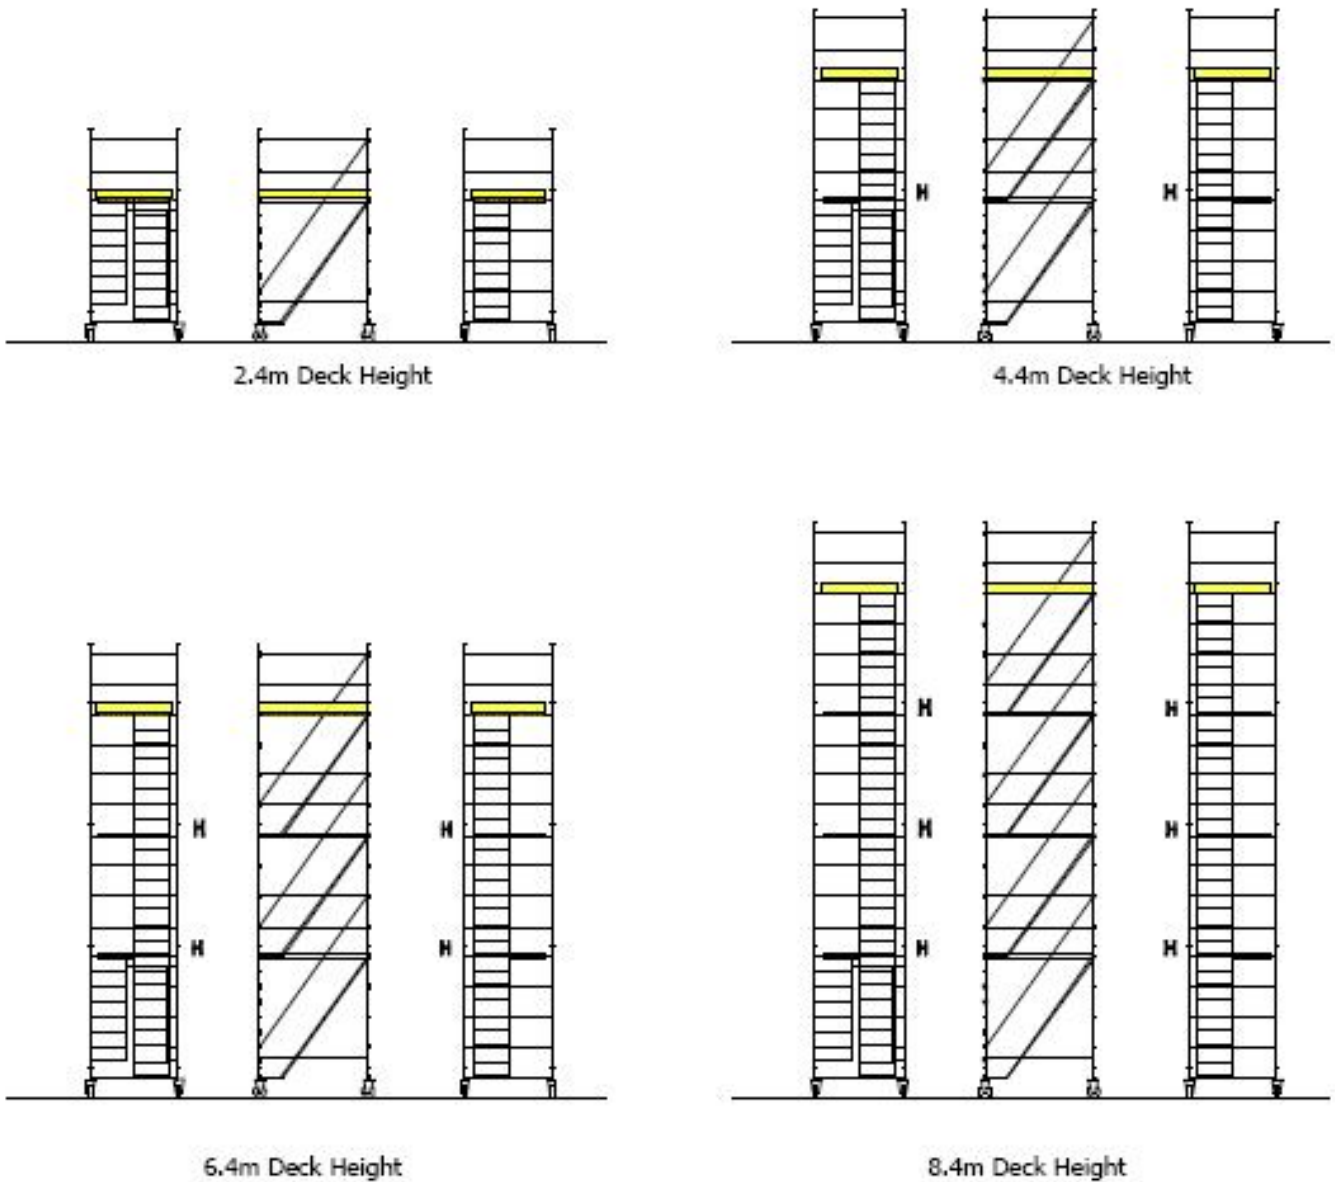

Guidance Notes

1. H = Horizontal brace fitted one side only. Positioned on vertical leg above top centre-tee casting of frame.

BOSS Intermediate Deck Stairway Tower Bracing Configuration Platform Heights 10.4m to 12.4m

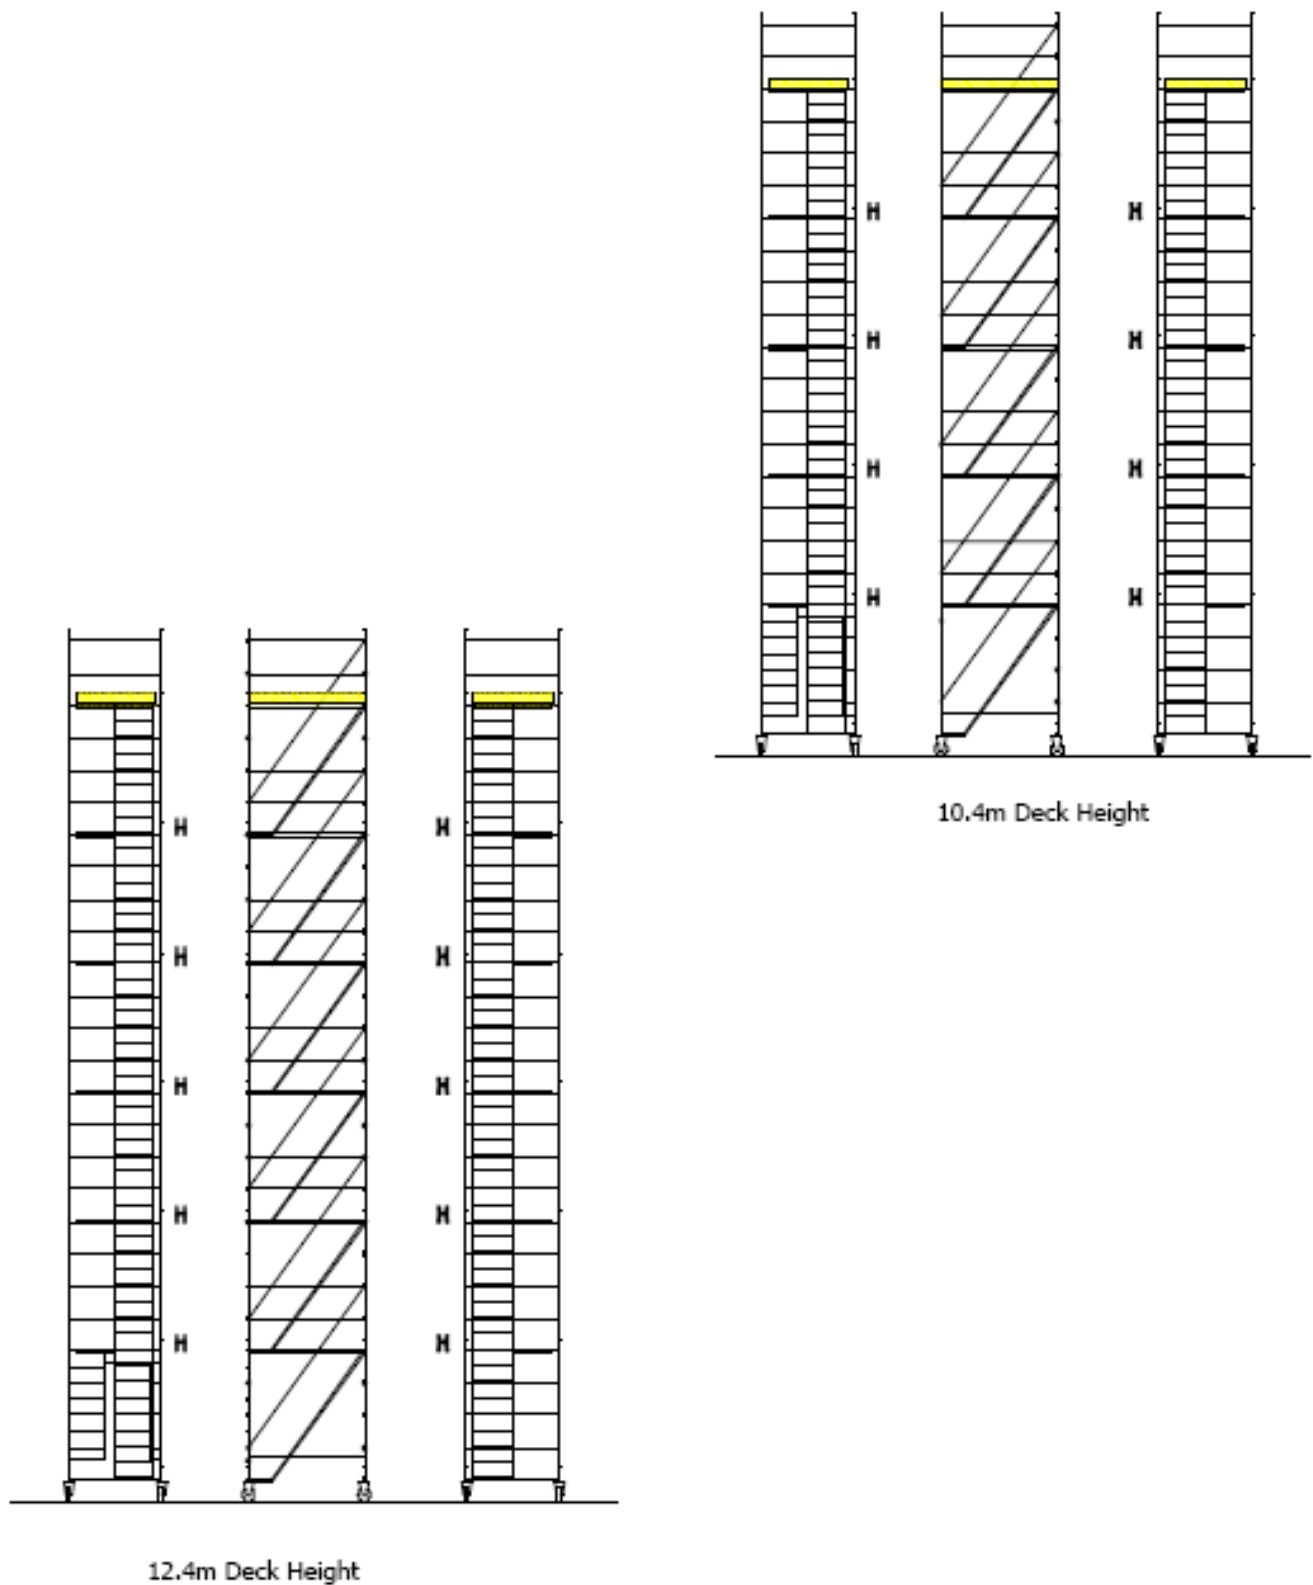

Guidance Notes

1. H = Horizontal brace fitted one side only. Positioned on vertical leg above top centre-tee casting of frame.