
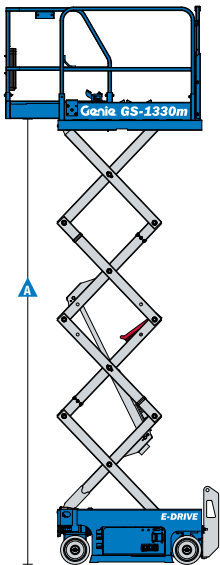



Self-Propelled Scissor Lifts

GS™ -1330m

Specifications



| Models | GS™ -1330m | |
|-----------------------------------|------------|-------------|
| Measurements | Metric | US |
| Working height maximum* | 5.9 m | 18 ft 10 in |
| A Platform height maximum | 3.9 m | 12 ft 10 in |
| B Platform height - stowed | 0.90 m | 2 ft 11 in |
| C Platform length - outside | 1.26 m | 4 ft 2 in |
| extended | 1.72 m | 5 ft 8 in |
| Slide-out platform extension deck | 0.46 m | 1.5 ft |
| D Platform width - outside | 0.67 m | 26.5 in |
| Guardrail height | 1.10 m | 3 ft 7 in |
| Toeboard height | 0.15 m | 6 in |
| E Height - stowed: fixed rails | 2.02 m | 6 ft 7.5 in |
| folding rails | 2.02 m | 6 ft 7.5 in |
| rails lowered | 1.68 m | 5 ft 6 in |
| F Length - stowed | 1.41 m | 4 ft 8 in |
| - stowed extended | 1.87 m | 6 ft 2 in |
| G Width | 0.78 m | 30.5 in |
| H Wheelbase | 0.98 m | 3 ft 3 in |
| I Ground clearance - centre | 6 cm | 2.4 in |
| - with pothole guards deployed | 2 cm | 0.63 in |

Productivity

| | | |
|---|---------------------------|-----------|
| Max platform occupancy (indoor/outdoor)** | 2/- | 2/- |
| Lift capacity | 227 kg | 500 lb |
| Lift capacity - extension deck | 91 kg | 200 lb |
| Drive height | Full height | |
| Drive speed - stowed | 4.0 km/h | 2.5 mph |
| Drive speed - raised | 0.8 km/h | 0.5 mph |
| Gradeability - stowed*** | 25%/14° | 25%/14° |
| Turning radius - inside | 40 cm | 15.7 in |
| Turning radius - outside | 1.55 m | 5 ft 1 in |
| Raise/lower speed | 20 / 24 sec | |
| Controls | Proportional | |
| Drive | dual rear wheel, electric | |
| Brakes | dual rear wheel, electric | |
| Tyres solid non-marking | 25.4 x 7.62 cm | 10 x 3 in |

Power

| | | |
|---------------------------|------------------------------------|-------|
| Power source | 24 V DC (two 12 V 85 Ah batteries) | |
| Hydraulic system capacity | 1.5 gal | 5.6 L |

Weight****

| | | |
|--|--------|----------|
| | 885 kg | 1,950 lb |
|--|--------|----------|

Standards Compliance

EU Directives: 2006/42/EC - Machinery (harmonized standard EN280);

2004/108/EC (EMC); 2006/95/EC (LVD)

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Indoor use only for the GS-1330m

*** Gradeability applies to driving on slopes, see Operator's Manual for details regarding slope ratings.

**** Weight will vary depending on options and/or country standards.

Features

Standard Features

Measurements

GS-1330m

- 5.9 m (18 ft 10 in) working height
- Up to 227 kg (500 lb) lift capacity

Productivity

- Folding rails with half-height swing gate
- Dual rear wheel DC electric drive
- Smart Link™ control system (joystick, 2 lift speeds & 2 selectable proportional drive speeds, user-friendly diagnostics)
- Rear recessed charger receptacle
- Platform control with battery charge indicator
- On-board diagnostic system
- AC power to platform
- Lanyard attachment points
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Dual rear wheel electric brakes
- Electric brake release
- Swing-out component trays
- Pothole guards
- Tilt level sensor with audible alarm
- Descent alarm
- Motion alarm
- Dual flashing LED beacons
- Electronic horn
- Hour meter

Power

- 24 V DC battery pack
- Universal 20 amp smart charger

Easily Configured To Meet Your Needs

Platform

- 1.26 m x 0.67 m (50 x 26.5 in) steel platform
- 0.46 m (1.5 ft) extension deck

Power

- 24 V DC (two 12V 85 Ah batteries)

Tyres

- Solid non-marking

Options & Accessories

Productivity Options

- Fixed rails with saloon doors
- Air line to platform⁽¹⁾
- Power to platform: plug, socket, with optional Residual-current Circuit Breaker with Overcurrent protection
- Biodegradable hydraulic oil
- Automotive horn

Power Options

- Power inverter⁽¹⁾ (800W, 120V/60Hz, 240V/50Hz or 110V/50Hz)
- AGM maintenance-free batteries



⁽¹⁾ Factory-fit option only

United Kingdom and MESART

The Maltings, Wharf Road, Grantham NG31 6BH, T: +44 800 988 3739 (toll free), Fax +44 (0)1476 584334, Email AWP-InfoEurope@terex.com
Middle East, Southern Africa, Russia and Turkey, T: +971 4 399 0381, Email AWP-InfoME@terex.com
Visit www.genielift.com/en-gb/about-genie/locations to view our global locations list.

Worldwide Manufacturing And Distribution

Australia · Brazil · Caribbean · Central America · China · France · Germany · Italy · Japan · Korea · Mexico · Russia · Southeast Asia · Spain · Sweden · United Arab Emirates · United Kingdom · United States

Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. © 2019 Terex Corporation.

